



700lm

Cartagenera Eclipse



Solar



ALS



Safety




Ray Sensor



+55°C
-10°C
Charging/
Discharging Temp

SOLAR UP & DOWN WALL LIGHT

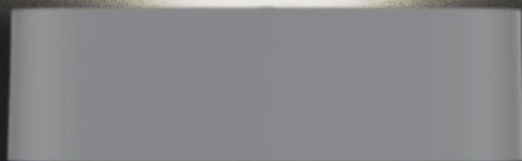

The hollow-like design in the middle forms an aperture, adding decorative elements to buildings.

Diverse installation methods

Support cable tie and wall mounted by screws.





Cable tie installation



Wall Mounted by Screws

SOLAR UP & DOWN WALL LIGHT

Item	Cartagenera Eclipse
Light Brightness	700lm (up 200lm, down 500lm)
Solar panel	
Power	Monocrystalline silicon, 4.4V/ 1.7W
Li-ion battery	
Capacity	3.7V 7.4WH
Charging / Discharging Temp	-10~+55°C
Charging Time	5.5H
LED	2835, 21pcs
CCT	4000K, Ra>70
Efficiency	160lm/W
Lighting Angle	Up&down lighting
Performance	
Lighting Time in Rainy day	>7 days
Lighting Mode	M1: 25% till dawn M2: 50% till dawn M3: 75% till dawn M4: 100% till dawn
Switch	1. ON and OFF: long press for 1.5S 2. Short press to switch the lighting mode
Core Technology	ALS2.3
IP	IP65
Lighting Area	7.8m²
Install Height	2.5m
Material	ABS+PC
Net Weight	0.415KG

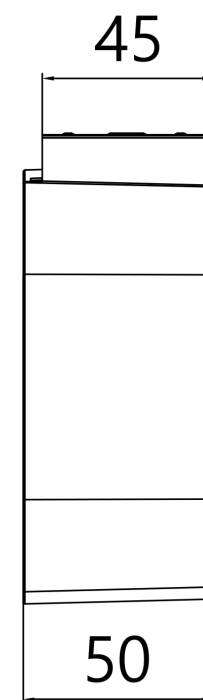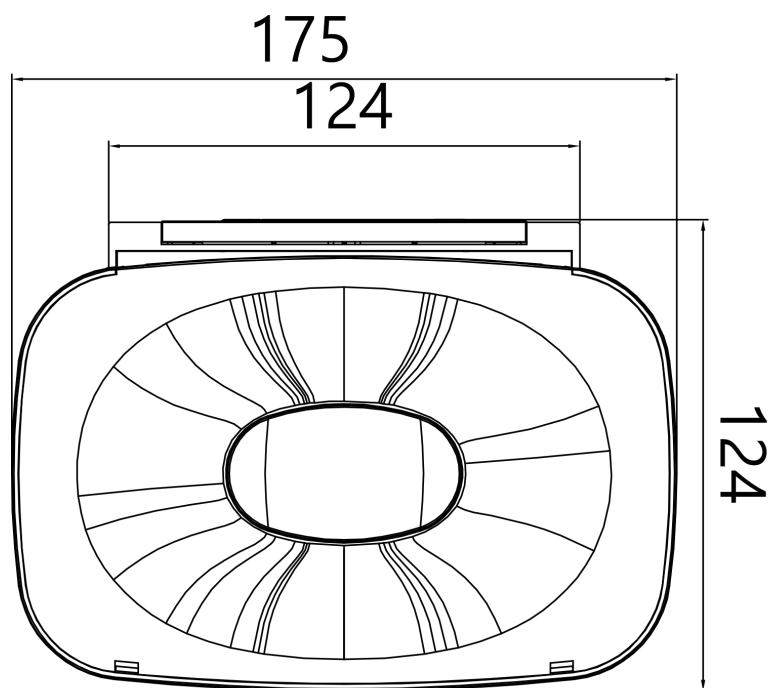



Up 200LM



Down 500LM



23% charging efficiency



Silicone button




Bracket



A Great Company should always pay the highest attention to every detail of design, and the craftsmanship spirit should be filled in the whole design process and mass production.

SOLAR UP & DOWN WALL LIGHT

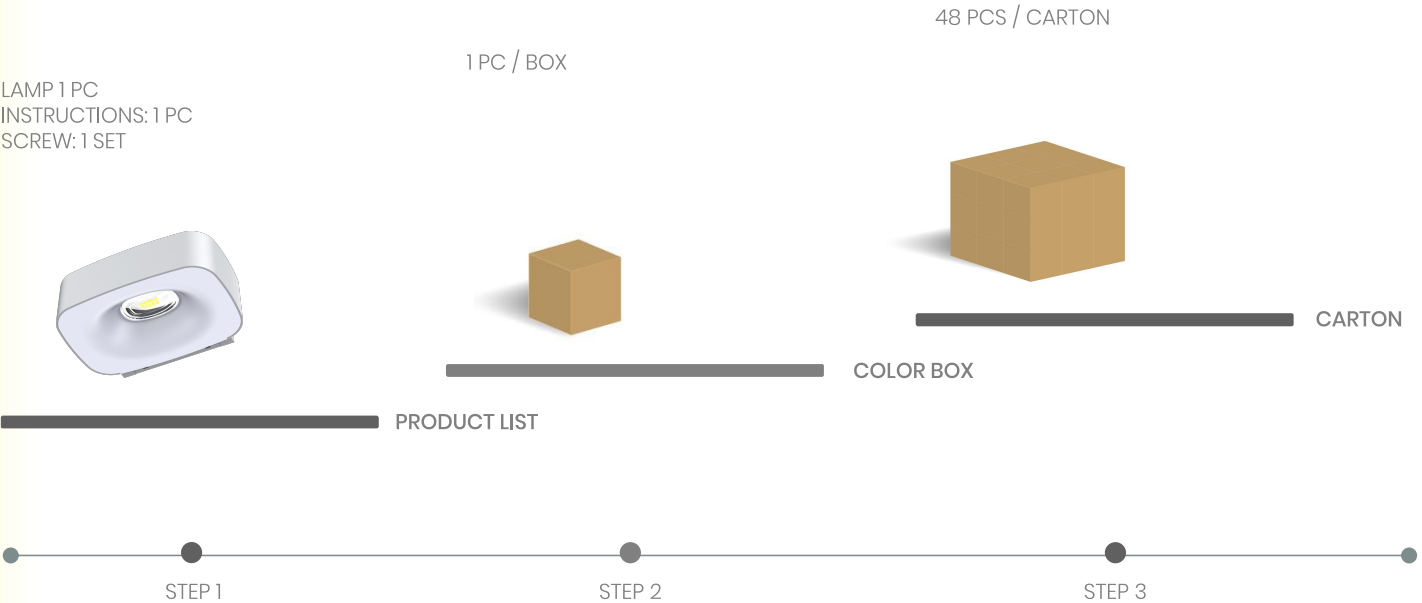

MODEL NO.	PACKING METHOD	PCS/CTN	QTY(PCS)	CTN QTY	CARTON SIZE(MM)	N.W.(KG)	G.W.(KG)
SWL-38	INNER BOX	1	1	1	180*55*130	0.4	0.47
	CARTON	48	48	1	460*380*410	19.2	24

Net weight and gross weight are for reference only



SOLAR / UP & DOWN / LIGHT

Solar
Boutique

INNOVATING
THE FUTURE OF SOLAR