



700lm

Cartagenera Numa



Solar



ALS



Safety



Ray Sensor



+55°C
-10°C
Charging /
Discharging Temp

**Inclination angle
design of the solar
panel, increasing
charging efficiency.**






Cut-off lighting effect, Anti Glare

The lighting forms a special shape, adding decorative elements to buildings.

Diverse installation methods


Support cable tie and wall mounted by screws.
Also Magnetic installation accessory is optional.

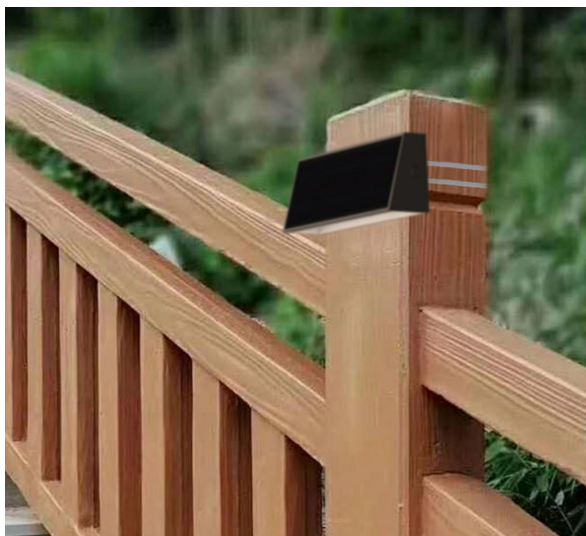

Wall Mounted by Screws



Cable tie installation


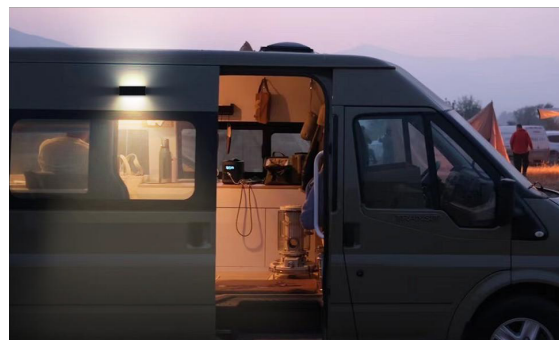


Magnetic installation is optional

Item	Cartagenera Numa
Light Brightness	700lm (up 200lm, down 500lm)
Solar panel	
Power	Monocrystalline silicon, 4.86V/1.3W
Li-ion battery	
Capacity	3.7V 7.4WH
Charging / Discharging Temp	-10~+55°C
Charging Time	≤7.5H
LED	2835, 36pcs
CCT	4000K, Ra>70
Efficiency	160lm/W
Lighting Angle	Rotated symmetrical 120°
Performance	
Lighting Time in Rainy day	>3 days
Lighting Mode	M1: 25% till dawn M2: 50% till dawn M3: 75% till dawn M4: 100% till dawn
Switch	1. ON and OFF: long press for 1.5S 2. Short press to switch the lighting mode
Core Technology	ALS2.3
IP	IP44
Lighting Area	9m²
Install Height	2.5m
Material	ABS + PC
Net Weight	0.23KG

unit: mm

SOLAR UP & DOWN WALL LIGHT

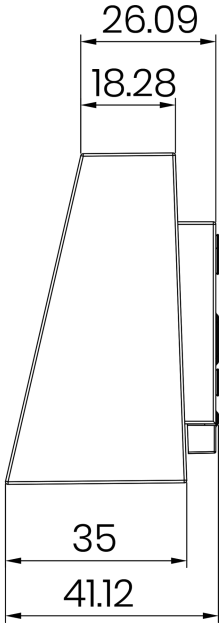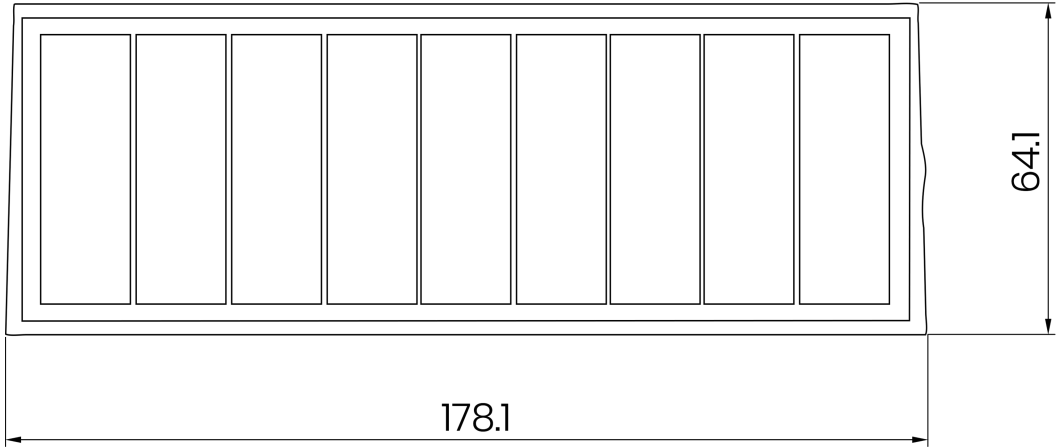

SOLAR UP & DOWN WALL LIGHT



Up 200LM



Down 500LM



23% charging efficiency



Silicone button




Bracket



A Great Company should always pay the highest attention to every detail of design, and the craftsmanship spirit should be filled in the whole design process and mass production.



SOLAR UP & DOWN WALL LIGHT

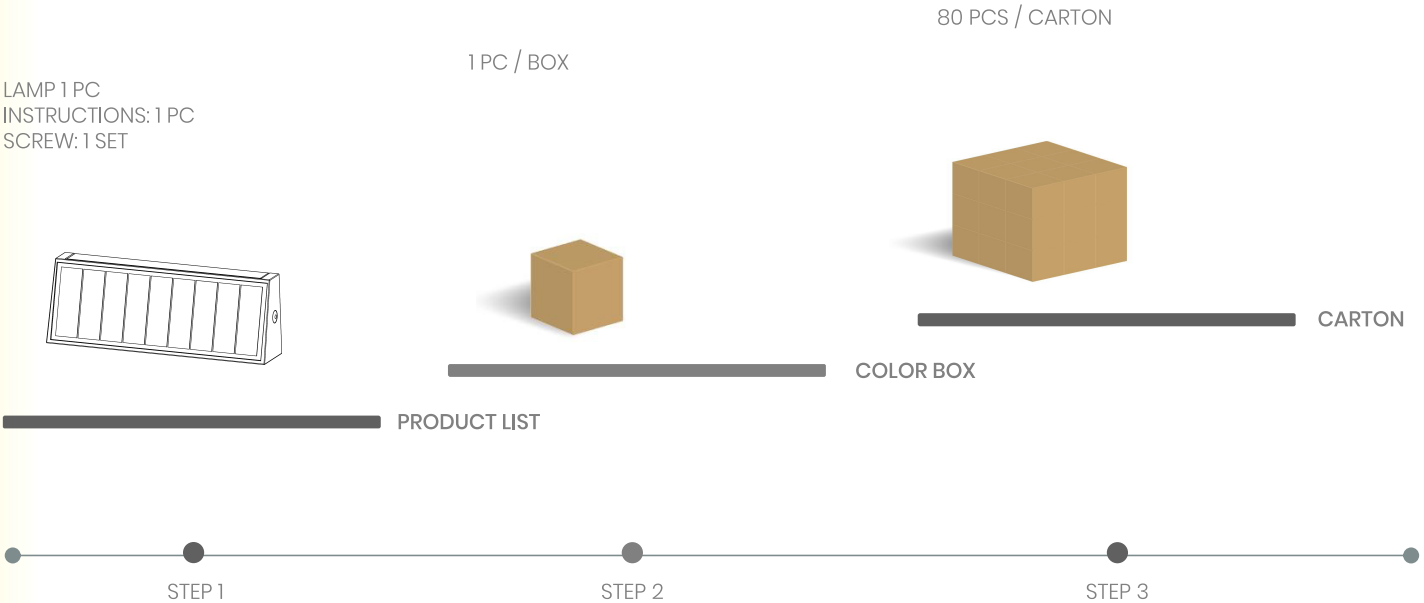

MODEL NO.	PACKING METHOD	PCS/CTN	QTY(PCS)	CTN QTY	CARTON SIZE(MM)	N.W.(KG)	G.W.(KG)
SWL-31	INNER BOX	1	1	1	182*44*69	0.23	0.26
	CARTON	80	80	1	384*372*365	18.4	21.6

Net weight and gross weight are for reference only



S O L A R / U P & D O W N / L I G H T



INNOVATING
THE FUTURE OF SOLAR