



Cubik



INTRODUCTION

Product specifications

01

FRONT COVER

02

CATALOG

03
~
06

MAIN
ADVANTAGES

07

SPECIFICATIONS

08

OPTICAL FIGURE

09

DIMENTION
FIGURE

10

MORE DETAILS

11

CORE
TECHNOLOGY

12

INSTALLATION
INSTRUCTIONS

13

PACKAGE DETAIL

14

APPLICATION

Frosted anti-glare Lampshade

360° lighting range, The light emitting complies with EU standard



Widely installation

—
easy to install on any ground,fence,table,post and grass.



Movable

—

Movable for other places installation
or work as portable lighting for
camping



IP64 waterproof





New technology enhances user experience

ALS technology to prolong the lighting time >7 rainy days
TCS technology to protect the lights can work normally and safety
in very hot and cold temperature

PIR——5m 120°

人来高亮，人走低亮。

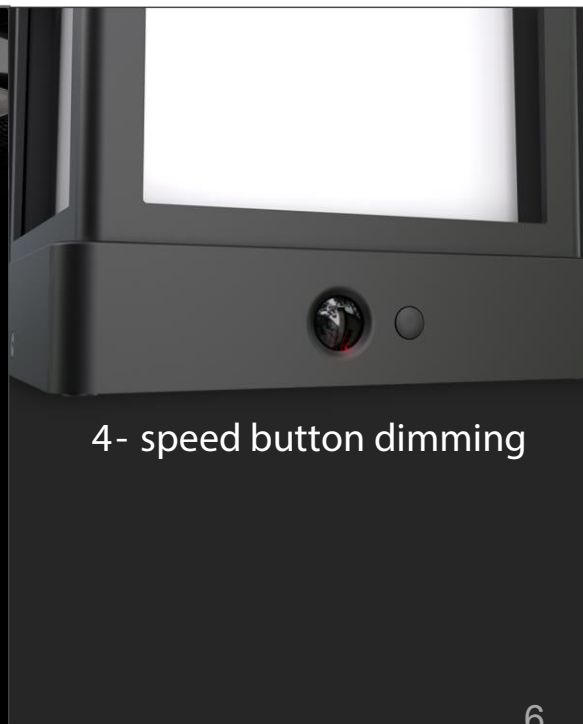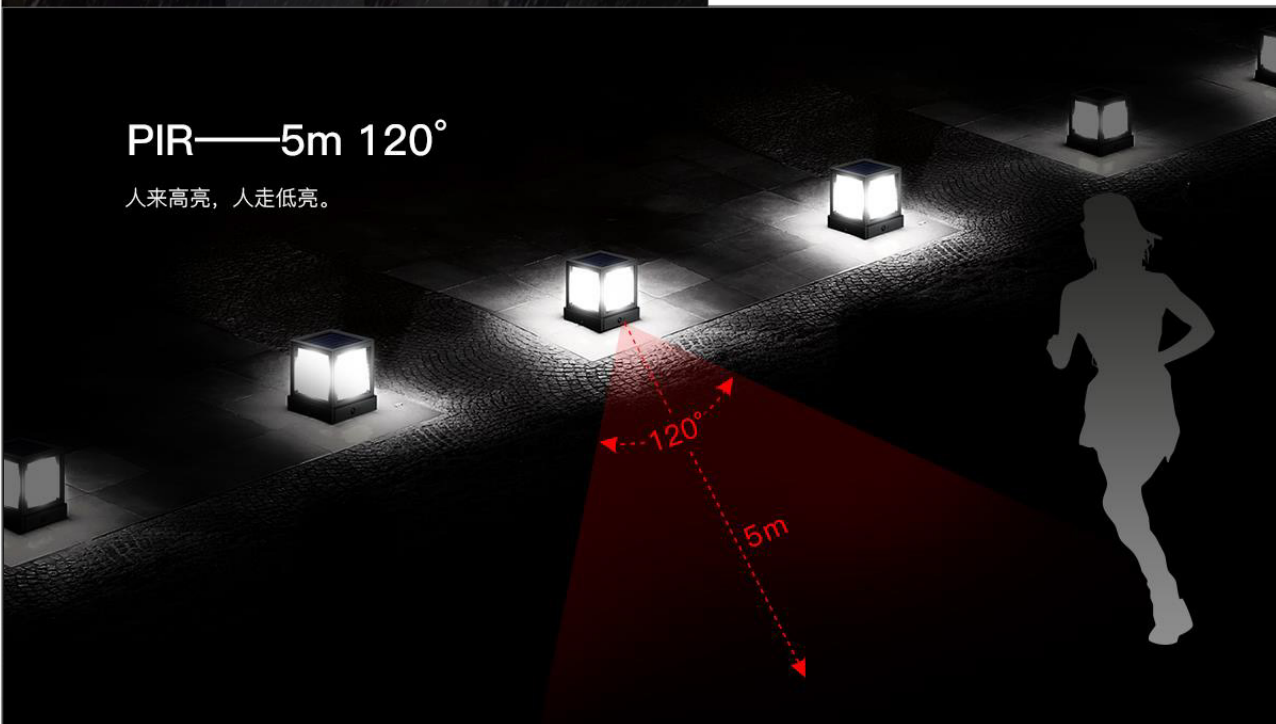


4- speed button dimming


Item: Cubik	
Light Brightness	1000LM
Solar panel	
Power	4.86V/1.4W
Li-ion battery	
Capacity	3.7V / 7.4 WH
Charging Temp	0~45°C /-20~+60°C
Charging Time	6.9H
LED	2835 / 20pcs
Color Temp	4000K RA70+
Efficiency	150lm/W
UV LED	-
Performance	
Lighting Time in Rainyday	>10 days
Control Mode	Button Switch, ON/OFF Long Press 1.5s
Lighting Mode	M1: 100lm+PIR (one minute) M2: 0+PIR (one minute) M3: 300lm Timed 6 hours M4: 1000lm 2Hrs
Mode Indication	-
Capacity Indication	-
PIR	120°
Core technology	ALS 2.3
Solar Panel Autoclean	-
IP/IK Class	IP65
Install Height	-
Types of Lighting	120°
Materials	ABS+PS

ESL-54


Road Simulated Diagram




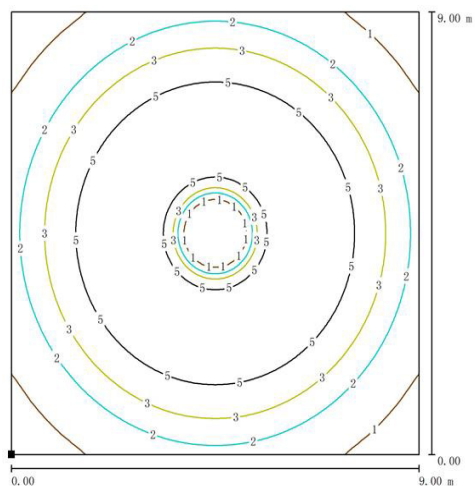


Illumination Curve

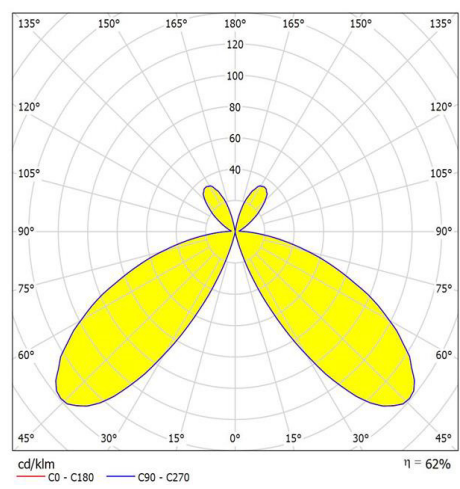


Luminance Distribution

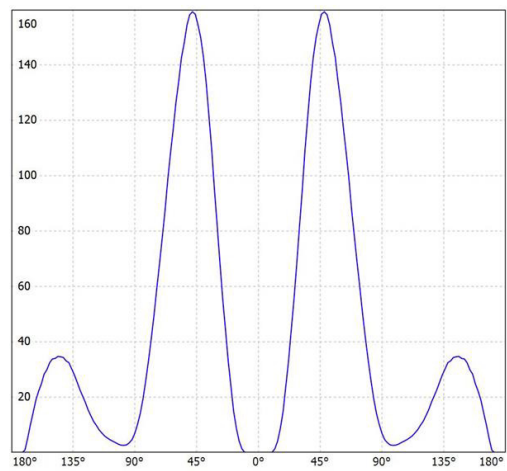


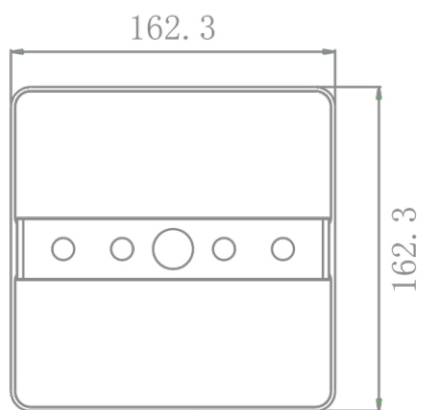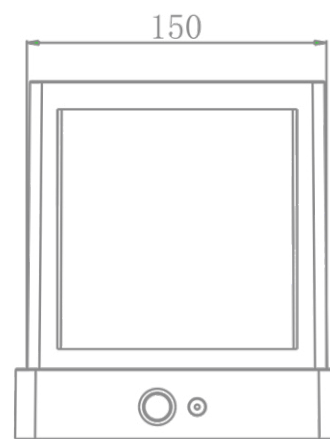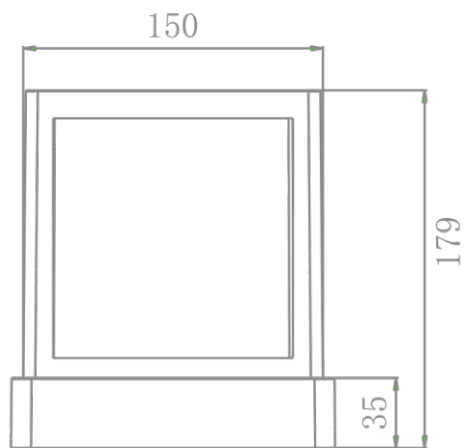


Advantage in every detail

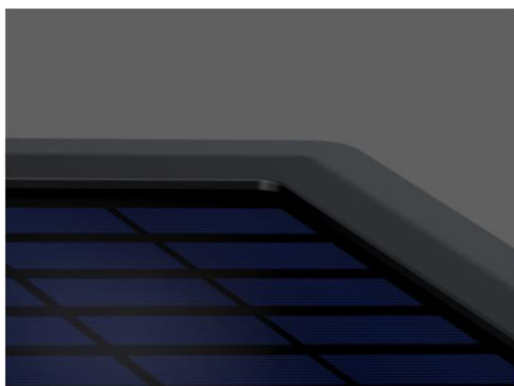


Monocrystalline >21%

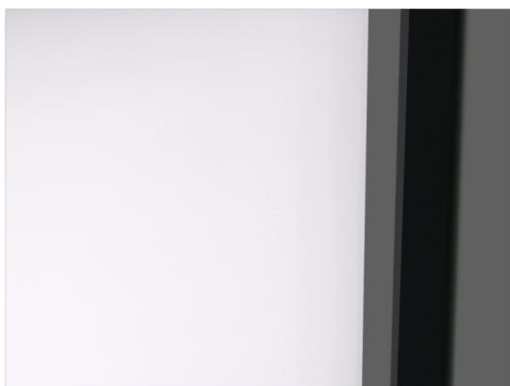

High lumen LEDs 150lm/W

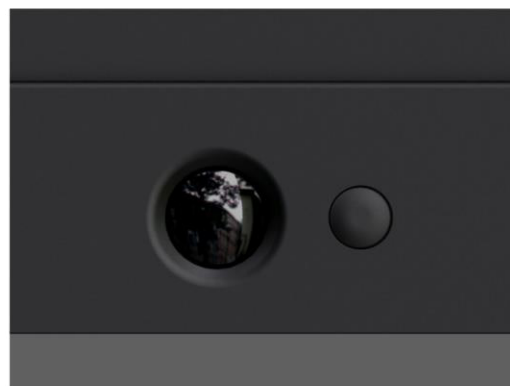


PIR /
Switch

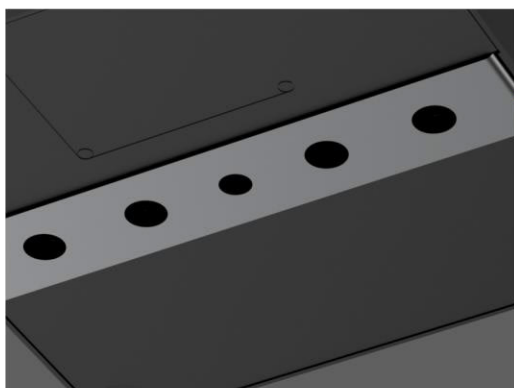


Bracket




Insert Ground

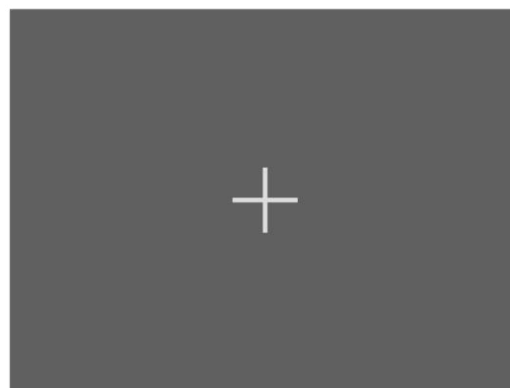


A Great Company should always pay the highest attention to the every detail design , and the craftsmanship spirit should be filled in the whole design process and mass production.

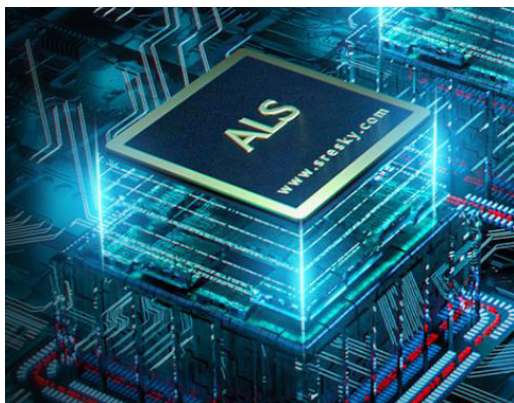


ADVANTAGE OF ALS

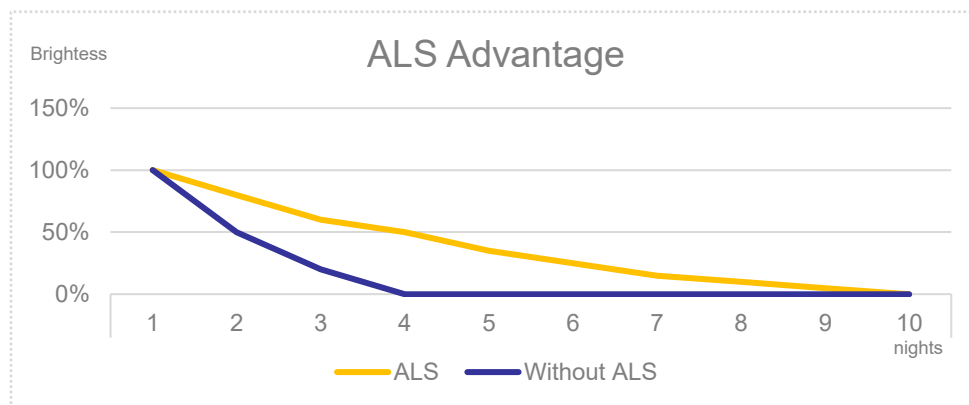

ADVANTAGE OF TCS

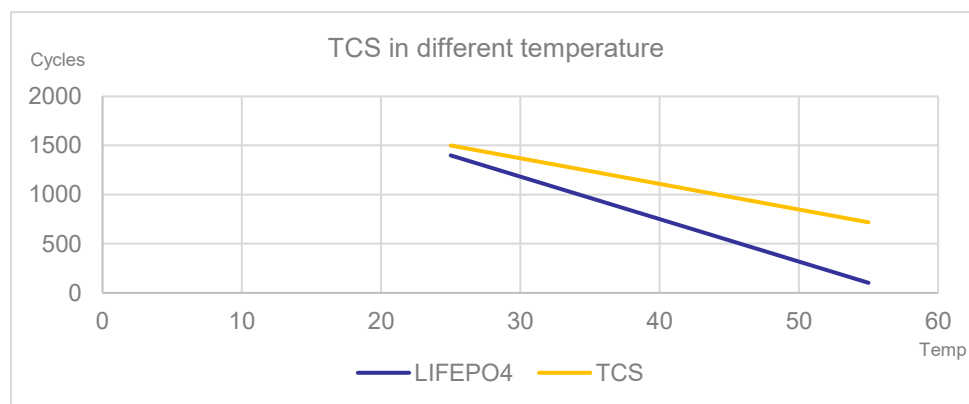


1 Take the bracket out


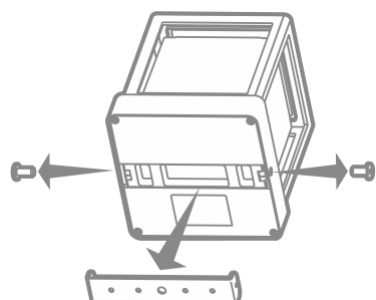


2

Install it by screws




Install it by stick





Fasten the bracket like this

3 Fix the lamp to the bracket

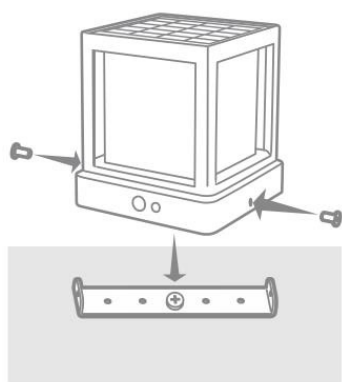

4 Finished



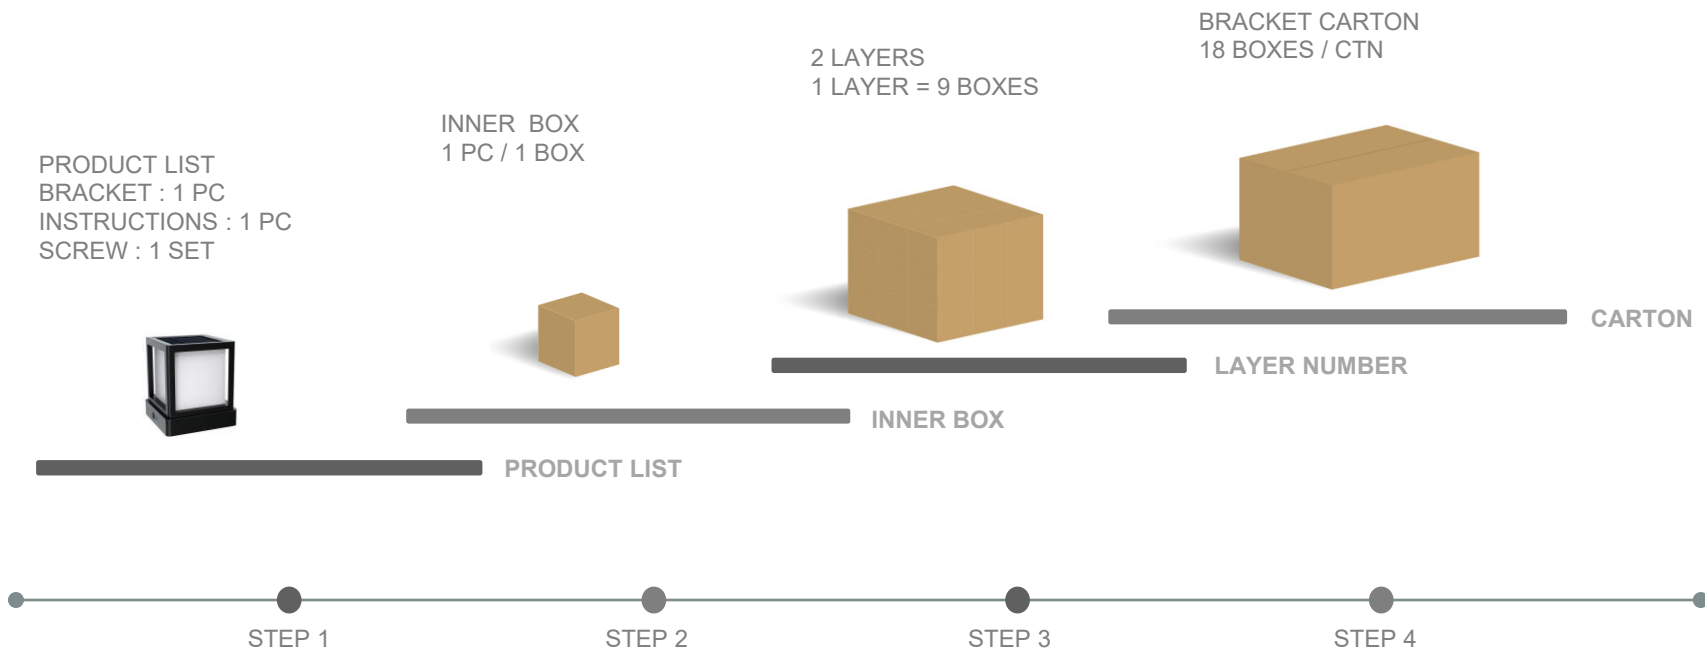

MODEL NO.	PACKING METHOD	PCS/ CTN	QTY(PCS)	CTN QTY	CARTON SIZE(MM)	N.W. (KG)	G.W .(KG)	Carton quantites of 20" GP	Carton quantities of 40" HQ
Cubik	INNER BOX	1	1	1	215x170x188	0.74	0.91	/	/
	CARTON	18	18	1	670x535x405	16.4	17.8	3276	6426

Net weight and gross weight are for reference only

S / O / L / A / R / L / I / G / H / T



Solar
Boutique