



1000LM

Moving Shadows



Siena



Solar



ALS



Safety



Ray Sensor




Charging
temperature




Working
temperature

SOLAR WALL LIGHT

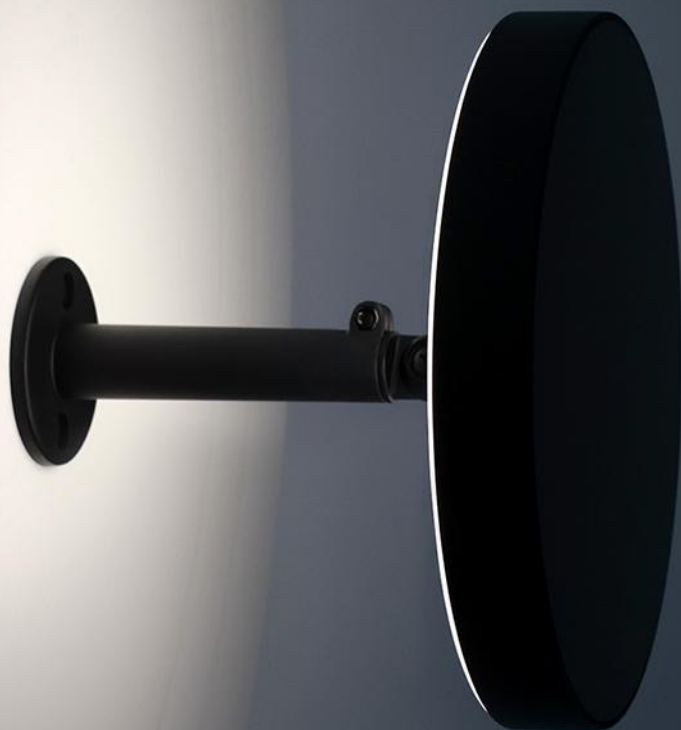

ROUND LAMP HEAD WITH RING LIGHTING DESIGN


Solar panel and lamp head angle can be adjusted vertically and horizontally.

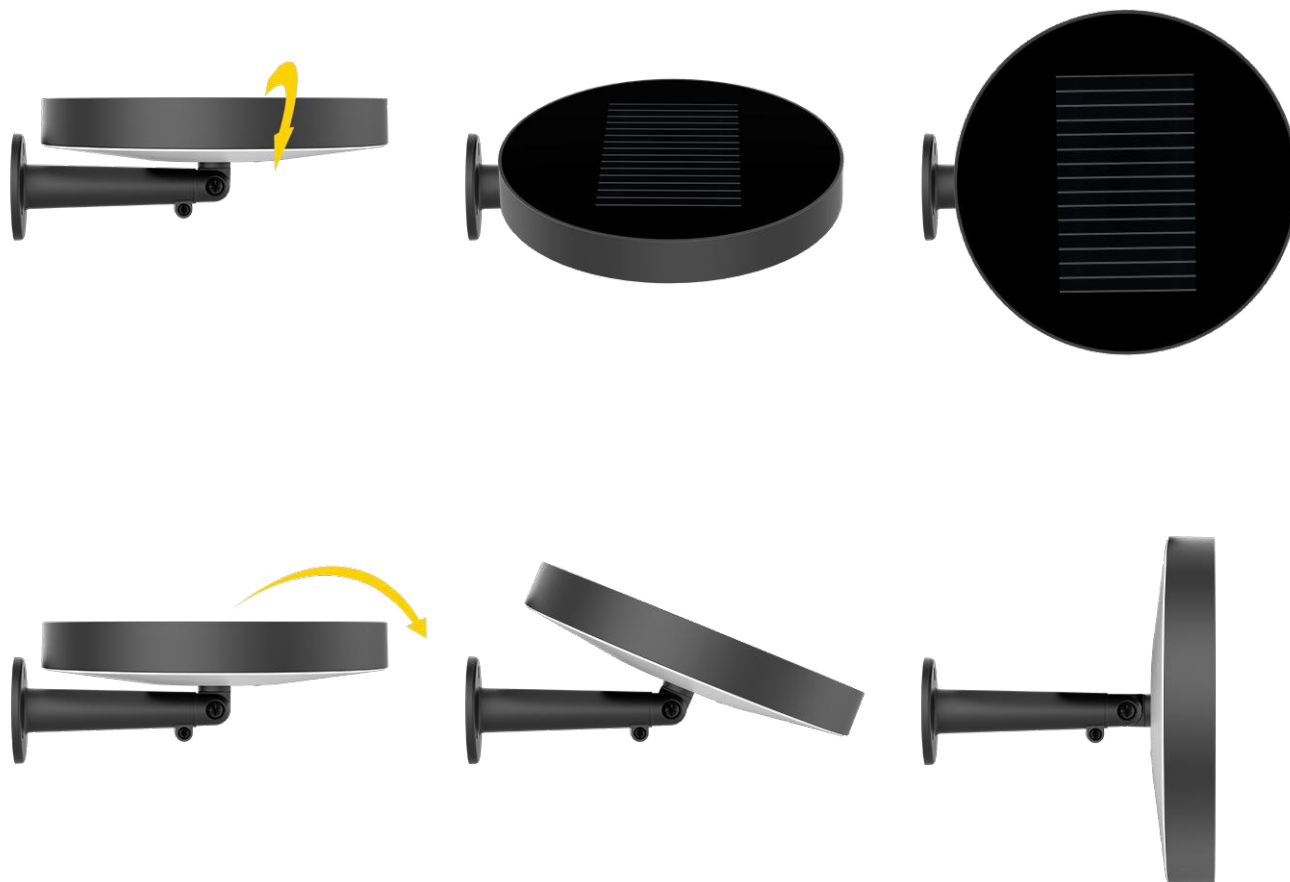

4 lighting modes to choose,
all mode you need are available


M1

25% till dawn

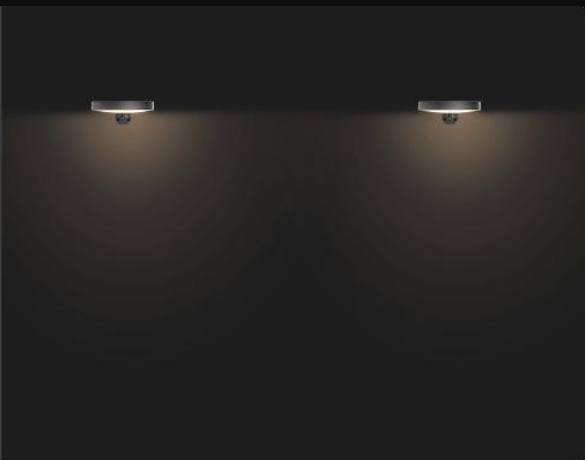


M2

10%
+
PIR (30S) till dawn

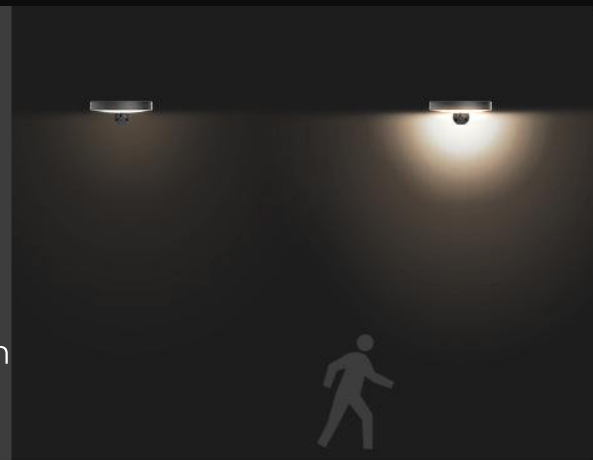


M3

0%
+
PIR (30S) till dawn



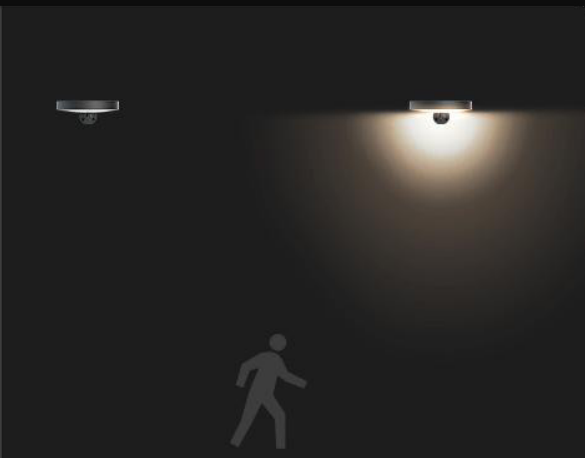


M4

100% till dawn

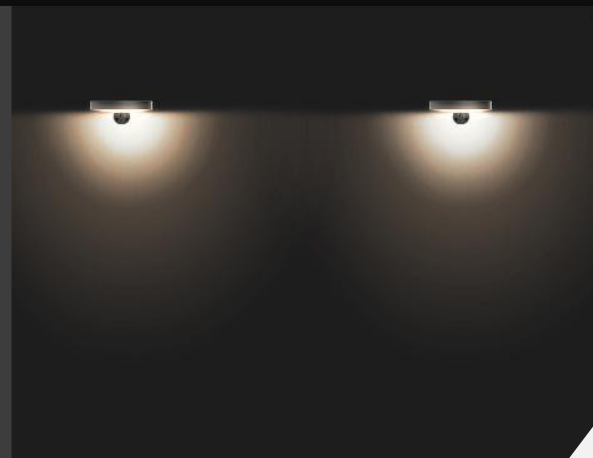

Item: Siena	
Light Brightness	1000Lumens
Solar panel	
Power	Monocrystalline silicon, 4.86V/ 1.5W
Li-ion battery	
Capacity	3.7V 7.4WH
Charging/Discharging Temp	0~45°C / -20~60°C
Charging Time	7H
LED	2835, 20pcs
Color Temp	4000K, Ra>70
Efficiency	160lm/W
Types of Lighting	Anti-glare
Performance	
Lighting Time in Rainy day	>3 days
Lighting Mode (Remote Control)	M1: 25% till dawn M2: 10% + PIR (30S) till dawn M3: 0% + PIR (30S) till dawn M4: 100% till dawn
Indicator light	Mode switching: M1: Flash 1 time; M2: flash 2 times; M3: flash 3 times; M4: flash 4 times
Control Mode	1. ON/OFF: long press for 1.5S 2. Short press to switch mode
PIR	120°, 3m.Max
Core technology	ALS2.3
IP	IP54
Install Height	2.5m
Materials	ABS + PS

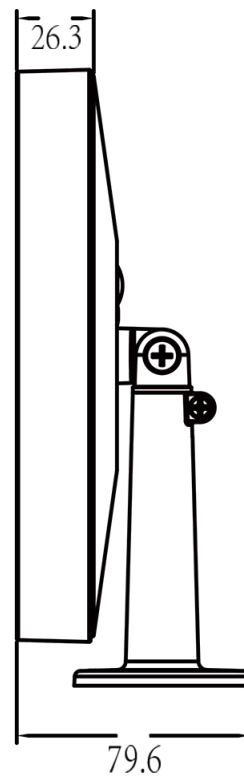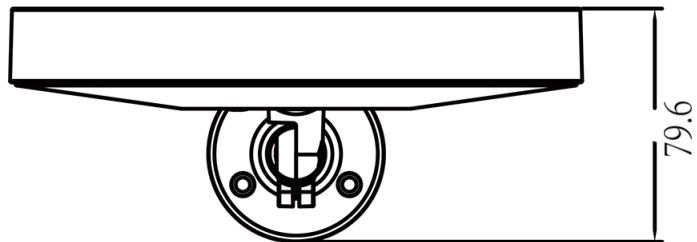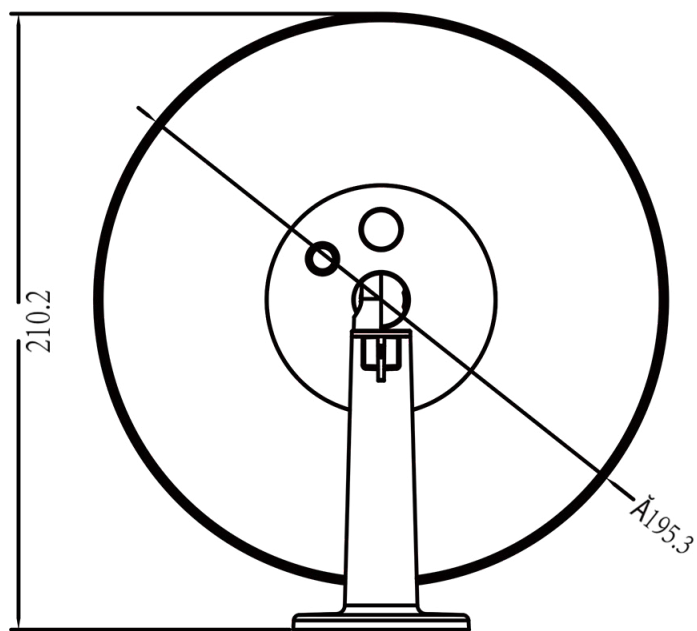

SOLAR WALL LIGHT



Monocrystalline silicon solar panel



Bracket



High lumen LEDs 160lm/W



PIR: 120°, 3m.Max





A Great Company should always pay the highest attention to every detail of design, and the craftsmanship spirit should be filled in the whole design process and mass production.



1 Punch holes in the wall and install plastic columns.

2 Fix the lamp body with screws.

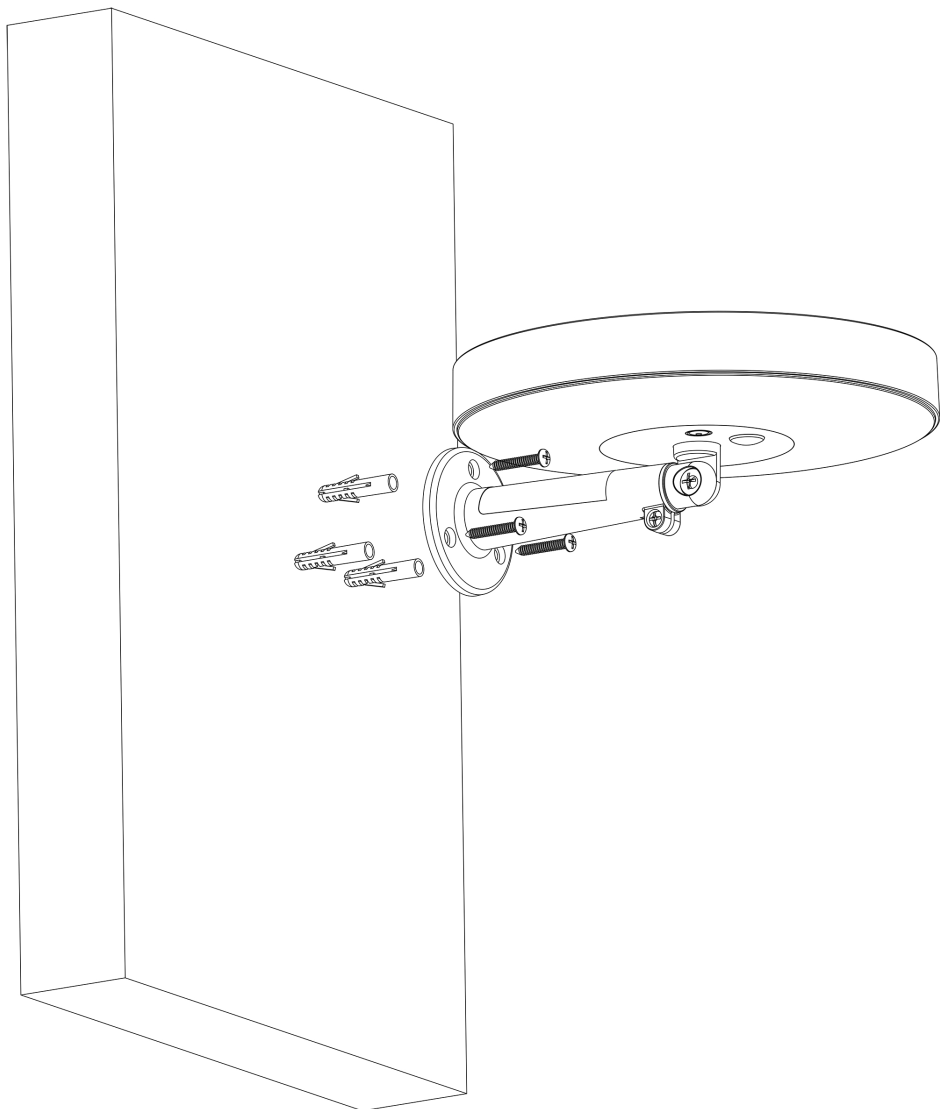

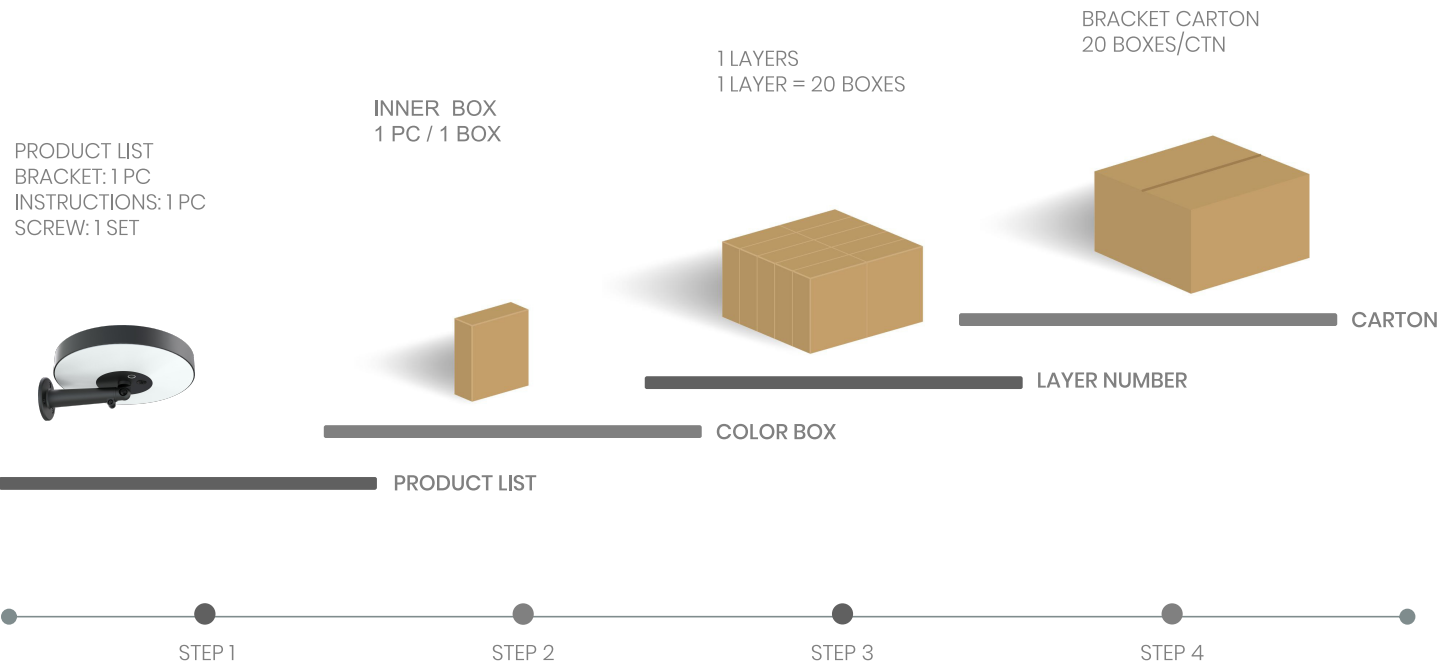

MODEL NO.	PACKING METHOD	PCS/CTN	QTY(PCS)	CTN QTY	CARTON SIZE(MM)	N.W.(KG)	G.W.(KG)
ESL-76	INNER BOX	1	1	1	238*224*85	0.52	0.75
	CARTON	20	20	1	495*468*445	15	16.4

Net weight and gross weight are for reference only





S O L A R / W A L L / L I G H T

INNOVATING THE FUTURE OF SOLAR