



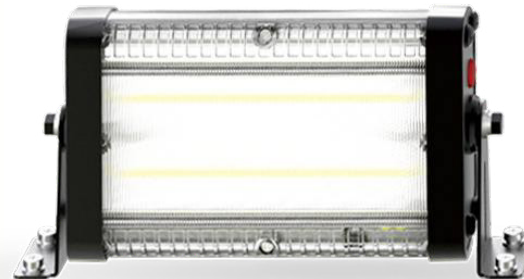

URANUS SWL-20PRO

3000LM
Reflector solar

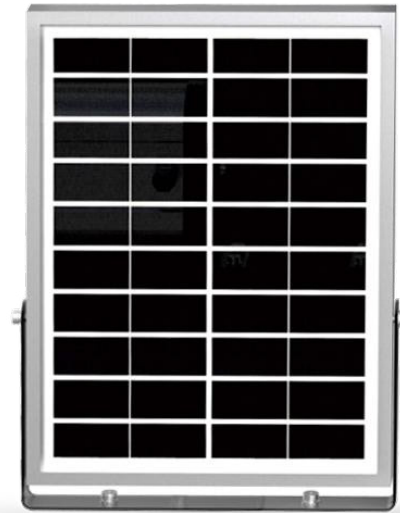

Solar



ALS



Safety



Ray Sensor



Charging
temperature




Working
temperature

SOLAR FLOOD LIGHT



GARAGE

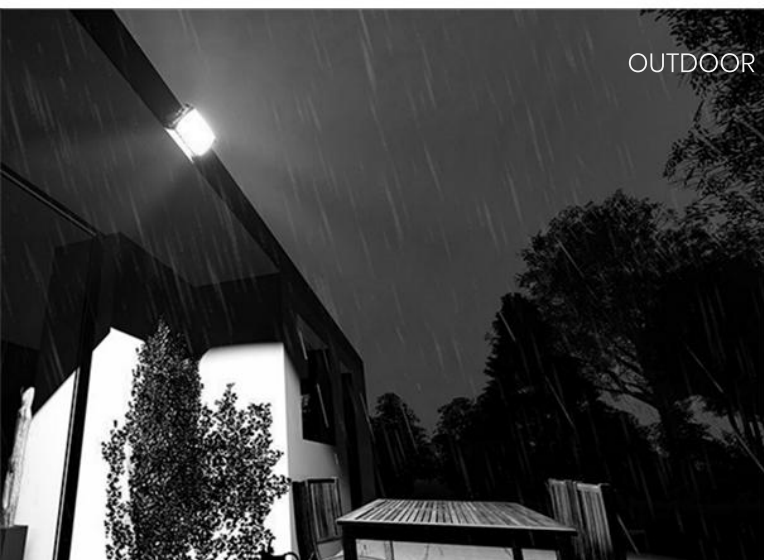

OUTDOOR

SOLAR FLOOD LIGHT

AMAZING IN PERFECT USE



SWL-20PRO


Equal to 300W Incandescent Lamp

2



Product Advantage

ALS Technology Guarantees 10 Continuous Working Nights
TCS Technology Ensures Longer Battery Lifespan

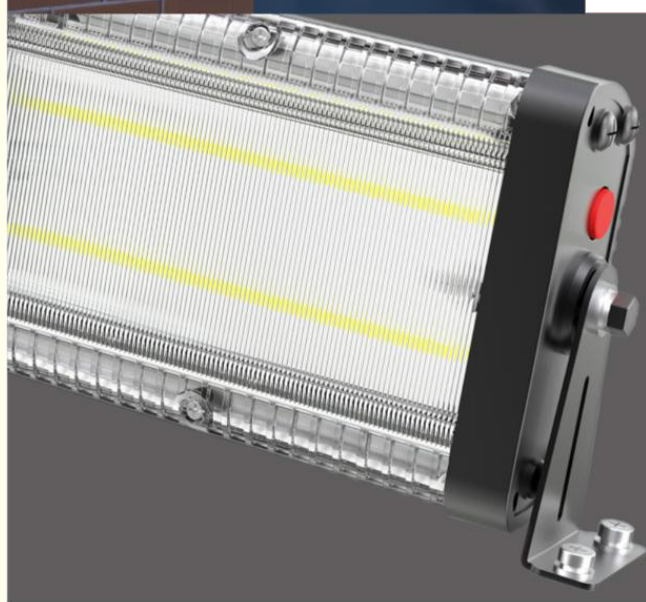

Equal to
300W
Incandescent
Lamp



SOLAR FLOOD LIGHT


Item:	SWL-20PRO
Light Brightness	3000LM
Solar panel	
Power	Monocrystalline silicon, 14V/ 5W
Li-ion battery	
Capacity	3.7V 28.86WH
Charging / Discharging Temp	0~45°C / -20~60°C
Charging Time	7.3H
LED (OSRAM)	3030, 30pcs
Color Temp	5700K, Ra>70
Efficiency	160lm/W
Types of Lighting	Symmetrical 90°
Performance	
Lighting Time in Rainy day	>3 days
Control Mode	Button Switch, ON/OFF Long Press 1.5s
Lighting Mode (Remote Control)	M1: 50% (5H) + 10% Till dawn M2: 30% (5H) + 10% Till dawn M3: 20% Till dawn T: 100% Timed 2Hrs and then return to the previous mode; Memory the next day
Mode Indication	M1: Red, M2: Green, M3: Orange, T: Green light flashes
Capacity Indication	Green: >70% Orange: 30%~70% Red: 10%~30%
Core technology	ALS2.3
IP	IP65
Material	Aluminum

SOLAR FLOOD LIGHT



Road Simulated Diagram



Illumination Curve

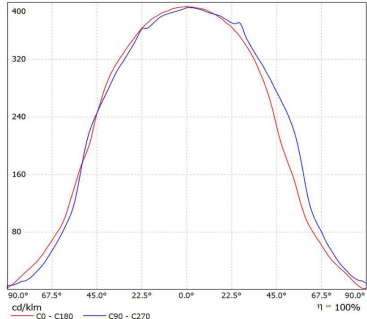


Luminance Distribution

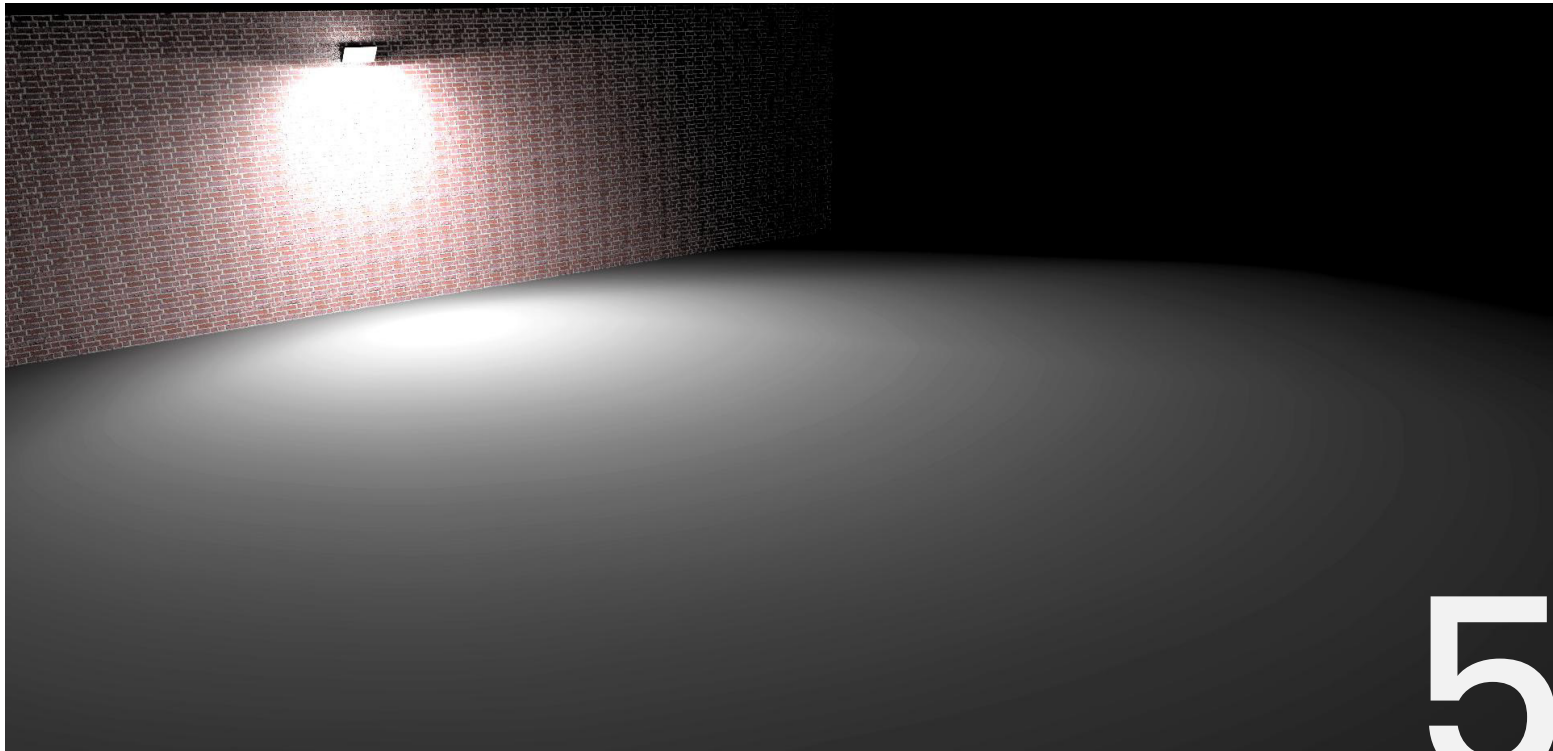


unit: mm


Solar Light

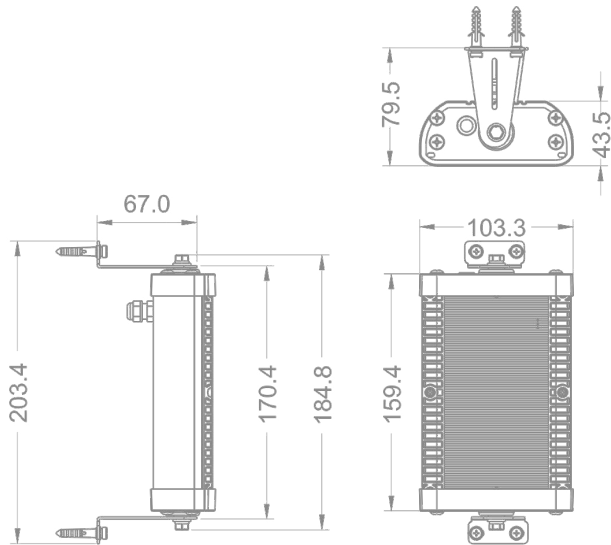

Solar Panel

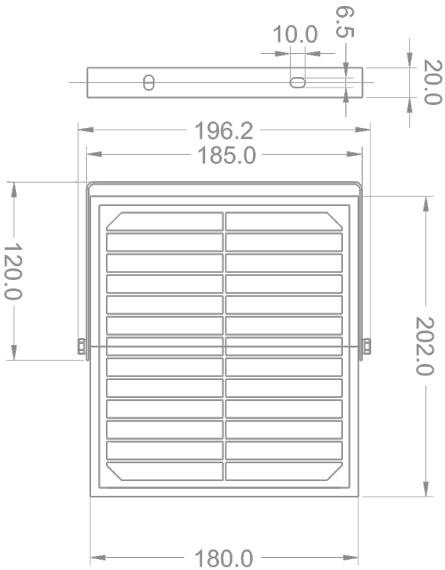

SOLAR FLOOD LIGHT

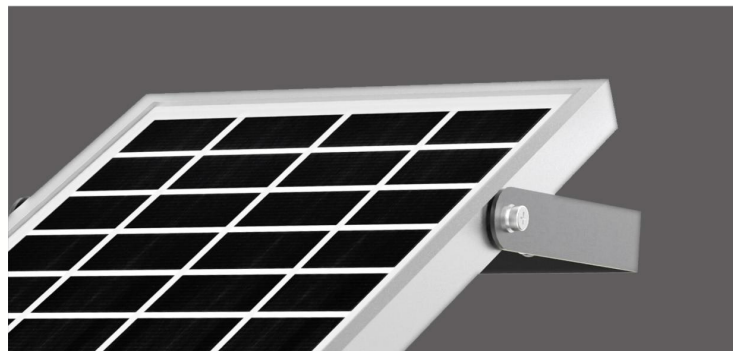


Solar Charging Efficiency: >21%



High lumen LEDs 160lm/W



Switch
Bracket

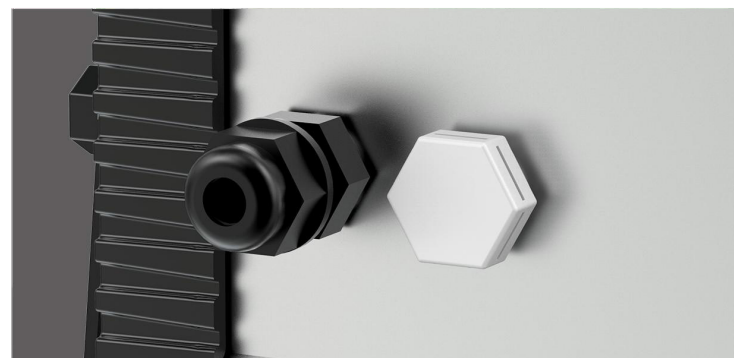


Air Valve




A Great Company should always pay the highest attention to every detail of design, and the craftsmanship spirit should be filled in the whole design process and mass production.


- 1 Fix the bracket on the wall, then screw solar panel into bracket.
D1 (10W / 5W): $\phi 6.5\text{mm}$
L1 (10W / 5W): 100mm

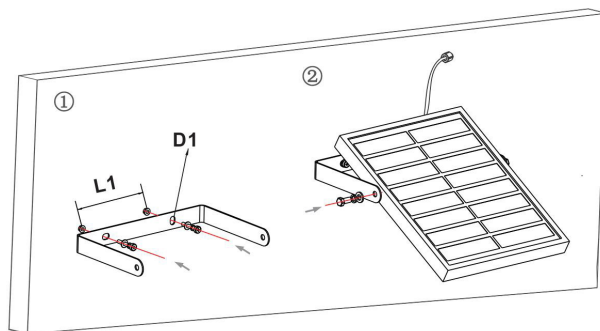


- 2 Screw the bracket on lamp body and mount on the wall.

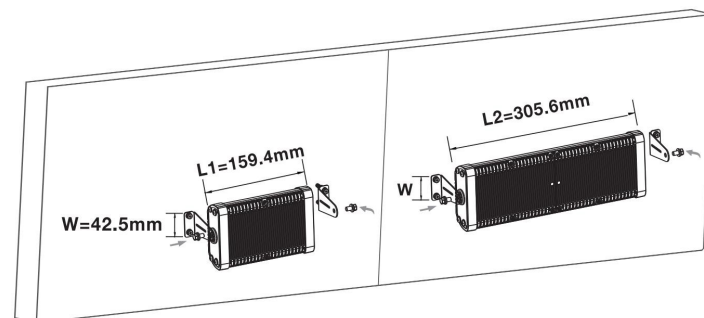

- 3 Connect lamp and solar panel by the cable.

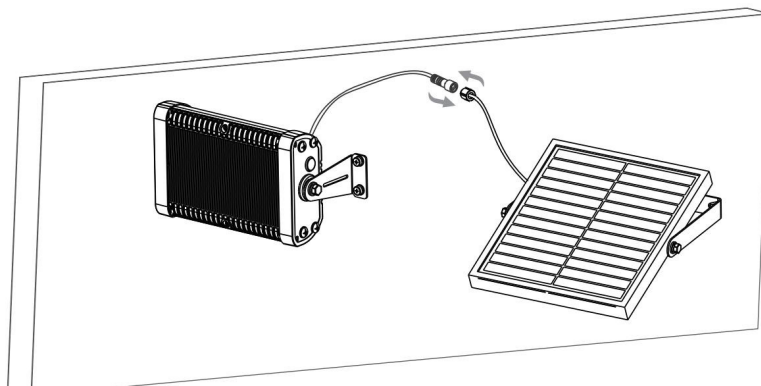

SOLAR FLOOD LIGHT

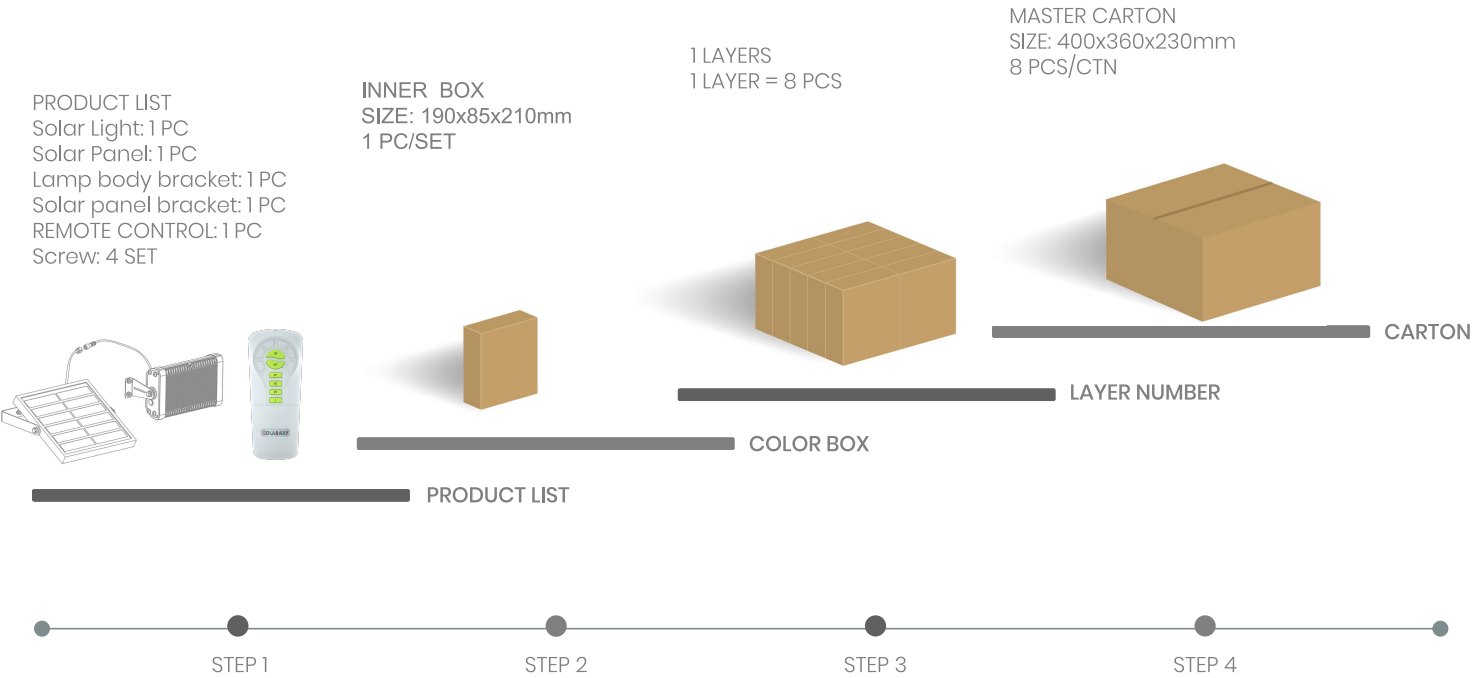

MODEL NO.	PACKING METHOD	PCS/CTN	QTY(PCS)	CTN QTY	CARTON SIZE(MM)	N.W.(KG)	G.W.(KG)
SWL-20PRO	INNER BOX	1	1	1	190*85*210	1.2	1.4
	CARTON	8	8	1	400*360*230	9.6	11.2

Net weight and gross weight are for reference only

S O L A R / F L O O D / L I G H T

INNOVATING THE FUTURE OF SOLAR

www.sresky.com