



1000LM

Spherical Wall Light With PIR

Selene



Solar



ALS



Safety




Ray Sensor



Charging
temperature



Working
temperature

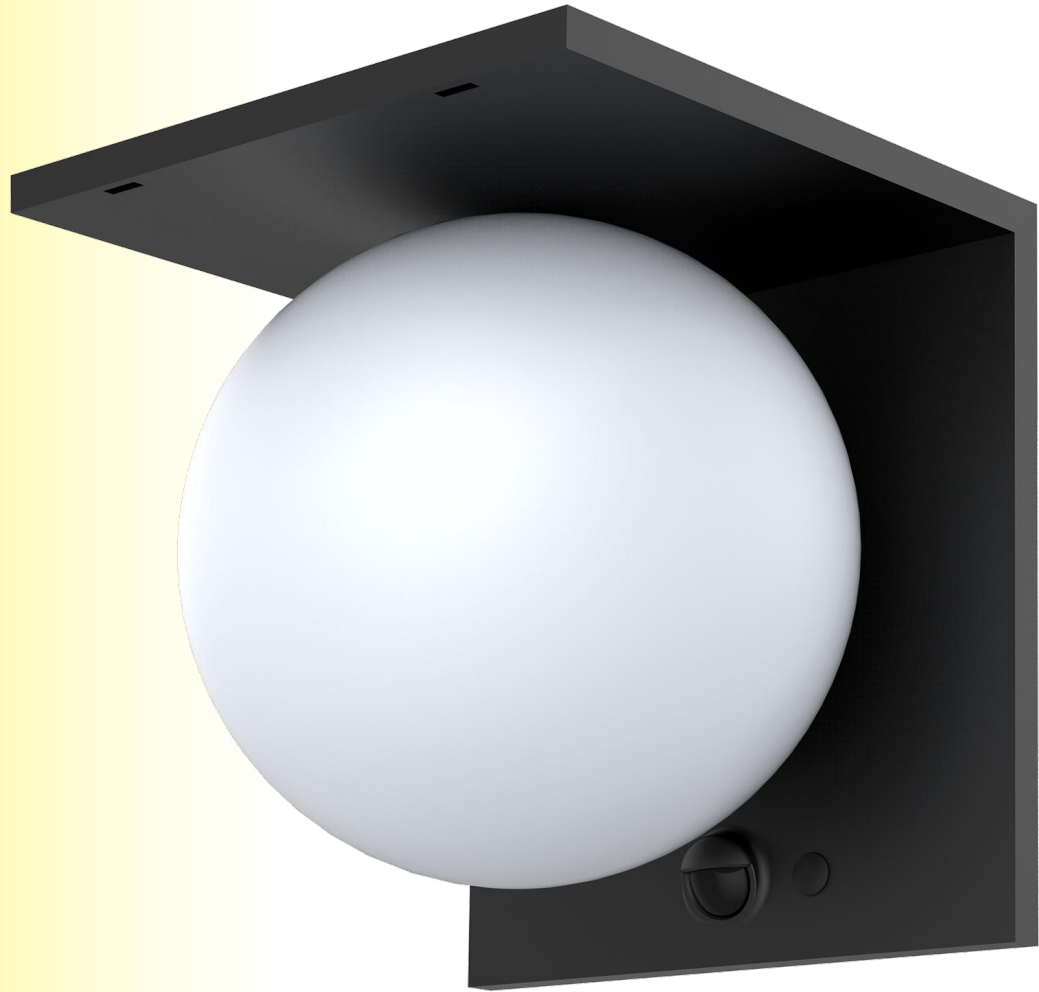

SOLAR WALL LIGHT



**The sphere
glows evenly,
the light is
more uniform
and soft**

Silicone button

Four lighting mode selections, smooth transition of light without a steep drop



Compatible with any building

The unique spherical wall light with PIR in the market



4 lighting modes to choose,
all mode you need are available

M1

25% till dawn



M2

10%
+
PIR (30s) till dawn



M3

0%
+
PIR (30s) till dawn




M4

100% till dawn



Item: Selene	
Light Brightness	1000 Lumens
Solar panel	
Power	Monocrystalline silicon, 4.86V/ 1.5W
Li-ion battery	
Capacity	3.7V 7.4WH
Charging / Discharging Temp	0~45°C / -20~60°C
Charging Time	7H
LED	2835, 20pcs
CCT	4000K, Ra>70
Efficiency	160lm/W
Types of Lighting	Anti-glare
Performance	
Lighting Time in Rainy day	>3 days
Lighting Mode	M1: 25% till dawn M2: 10% + PIR (30S) till dawn M3: 0% + PIR (30S) till dawn M4: 100% till dawn
Indicator light	Charging indicator: The red indicator light flashing
	Working indicator: The red indicator light is always on when turn on the light and discharging
	Mode switching: M1: Flash 1 time; M2: flash 2 times; M3: flash 3 times; M4: flash 4 times
Switch	1. On and off: long press for 1.5S 2. Short press to switch the lighting mode
Core Technology	ALS2.3
IP	IP54
PIR	120°, 5m.Max
Install Height	2.5m
Material	ABS + AS
Net Weight	400g

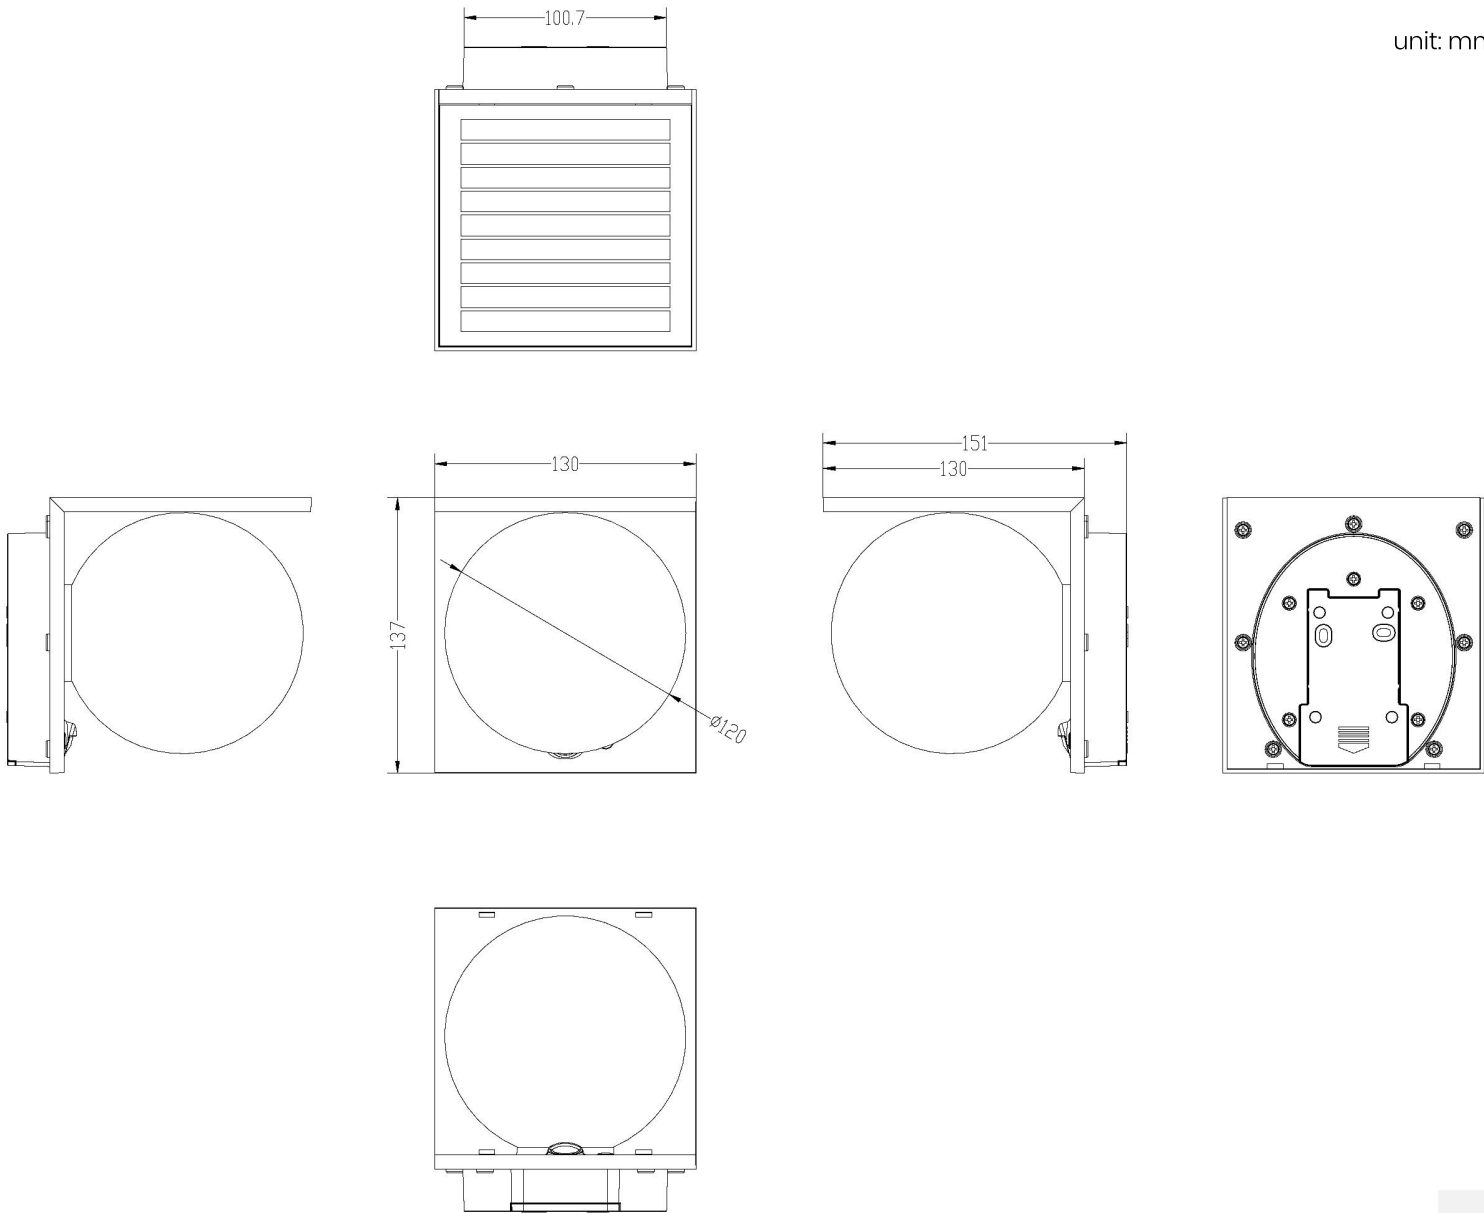

SOLAR WALL LIGHT



Monocrystalline silicon solar panel







PIR: 120°, 5m.Max




High lumen LEDs 160lm/W



A Great Company should always pay the highest attention to every detail of design, and the craftsmanship spirit should be filled in the whole design process and mass production.

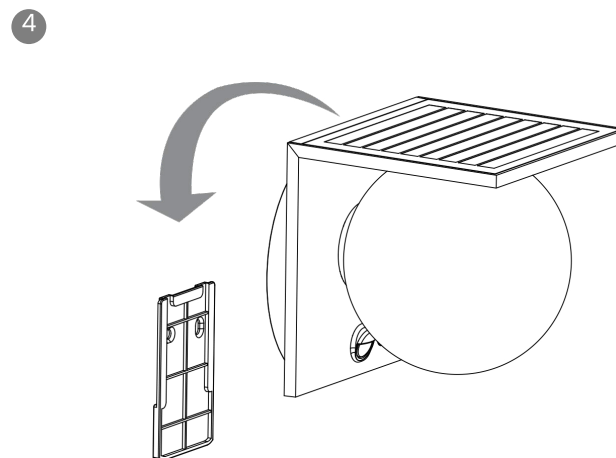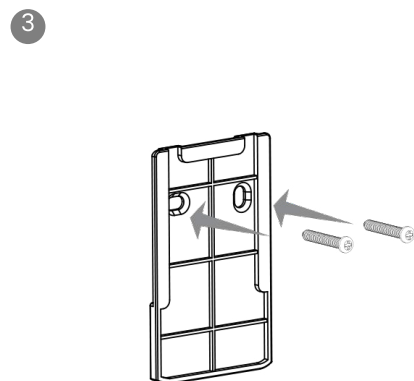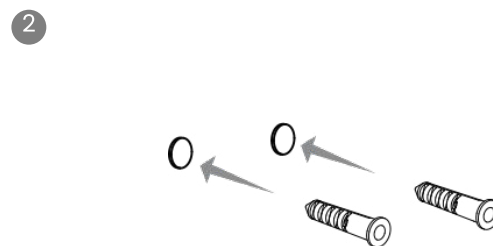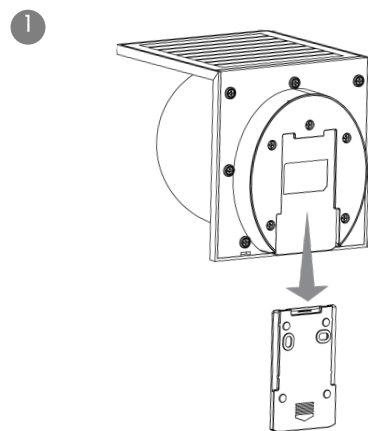

SOLAR WALL LIGHT

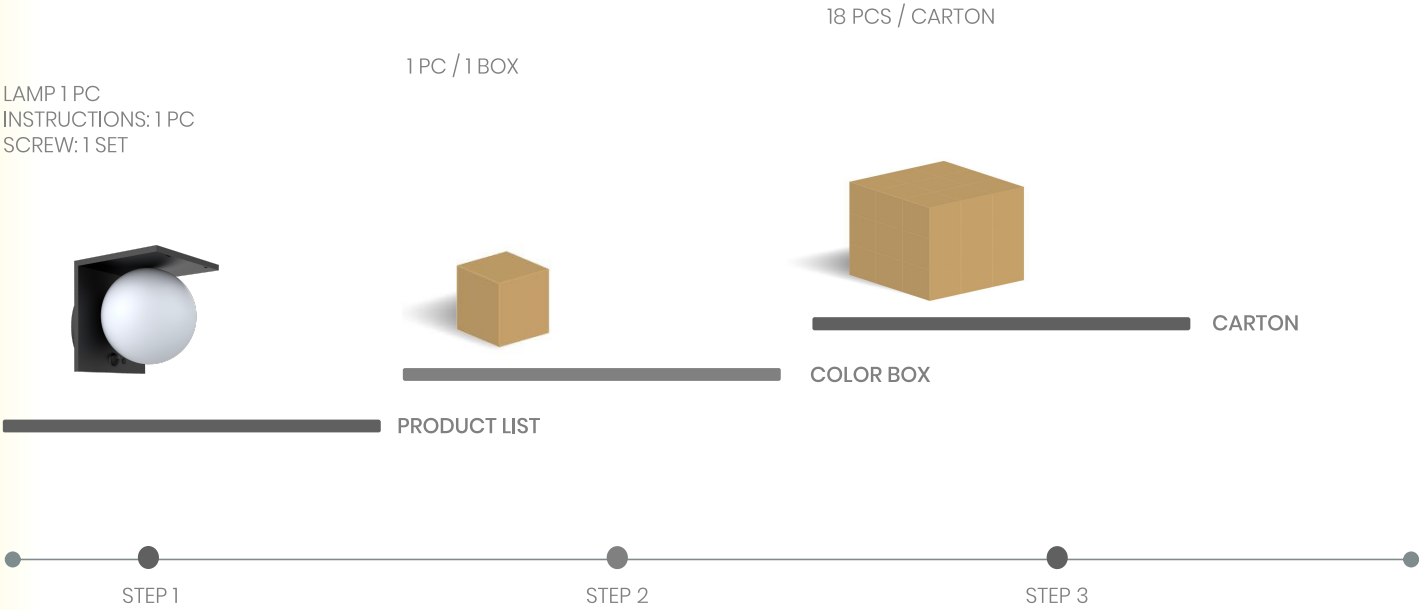

MODEL NO.	PACKING METHOD	PCS/CTN	QTY(PCS)	CTN QTY	CARTON SIZE(MM)	N.W.(KG)	G.W.(KG)
SWL-26	INNER BOX	1	1	1	144*137*162	0.39	0.51
	CARTON	18	18	1	452*430*344	7.02	10.1

Net weight and gross weight are for reference only

S O L A R / W A L L / L I G H T



INNOVATING
THE FUTURE OF SOLAR